


Introducing the better choice . . .



Belt Drive

NEW

long version

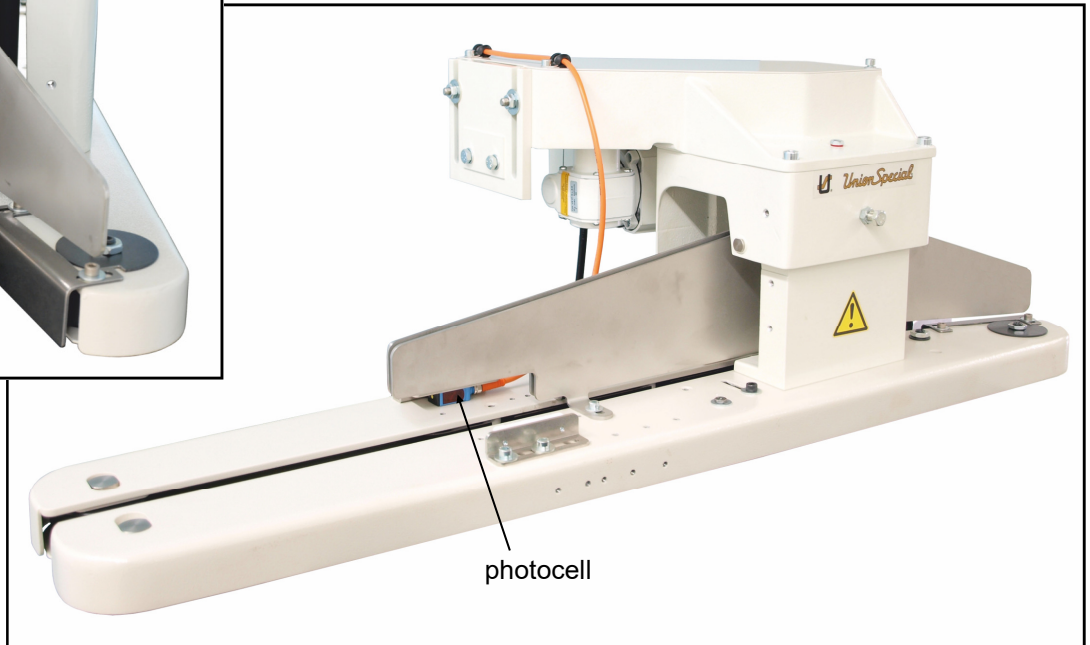

photocell

. . . in bag closing

Bag Feed-in Devices with Belt Drive
for the high speed and high performance bag closing machines
Series BC200, BCE300 and 80800

BF(S)29900, BFB(S)29900:

Frequency controlled speed, power supply: 230 V, 1 phase, 50 Hz

Common Specification:

All external parts are rust protected.

Belt conveyor to protect the bag material.

Degree of protection: IP 55. Insulation class: F.

Painting: RAL 9002, powder coated.

Delivery includes pre-feeler switch 29926A (position switch) to start the sewing machine.

Option: By photocell 29926EOS (see picture)

Other voltages and frequencies on request.

● **STURDY**

● **RELIABLE**

● **EFFICIENT**

| Part No. | for Machine Styles | Description |
|------------|-----------------------------|---|
| BFB29905A | BC211/BCE311 80800 | Bag feed-in device <u>with belt drive</u> (V-type (V), long bag in-feed) The spread paper, HDPE-foil or woven PP bag is fed into the sewing machine. Speed 11-23 m/min. at 50 Hz. Depending on the length and filling height of the bag the seam can be adjusted to a depth of up to 120 mm from top of the bag, standard setting 30-40 mm. |
| BF29905A | BC211/BCE311 80800 | Same as BFB29905A, V-type (V) , but short version. |
| 93051R | | Bag-top fold-over device to fold the bag top to the rear. Assembling to the bag feed-in devices BFB29905A and BF29905A required. For all kinds of self-supporting bags. Performance test of bag material recommended. |
| BFBS29905A | BC211/BCE311 80800 | Same as BFB29905A, but paralleler (II) , long bag in-feed. |
| BFS29905A | BC211/BCE311 80800 | Same as BFBS29905A, parallel (II) , but short version. |
| 93051RS | | Bag-top fold-over device to fold the bag top to the rear. Assembling to the bag feed-in devices BFBS29905A and BFS29905A required. For all kinds of self-supporting bags. Performance test of bag material recommended. |
| BF29905ATF | BC211/BCE311 | Same as BF29905A, but additional with roller guide (front) for controlled feeding of labels at front side of bags. |
| BF29905ATR | BC211/BCE311 | Same as BF29905A, but additional with roller guide (rear) for controlled feeding of labels at rear side of bags. |
| BFB29910A | BC211UA/BCE311UA 80800UA | Combined bag feed-in, trimming and taping device <u>with belt drive</u> and crepe tape folder (V-type (V), long bag in-feed) . Width of tape not adjustable. Folder available for 50, 55 and 60mm wide tapes. Please specify. Standard 60mm. Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped before sewing. Performance test of bag material recommended. |
| BFB29915A | BC211/BCE311 80800 | Combined bag feed-in, trimming and fold-over device <u>with belt drive</u> (V-type (V), long bag in-feed) . Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 50 mm), folded over to the rear by approx. 30-40 mm and fed into the sewing machine. Performance test of bag material recommended. |
| BFB29920A | BCE311KA 80800TA | Combined bag feed-in and trimming device <u>with belt drive</u> (V-type (V), long bag in-feed) . Speed 9-16 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped after sewing. Performance test of bag material recommended. |
| BFBS29920A | BCE311KA 80800TA | Same as BFB29920A, but parallel(II) , long bag in-feed. |

Subject to change without notice © Union Special GmbH