


## Introducing the better choice . . .

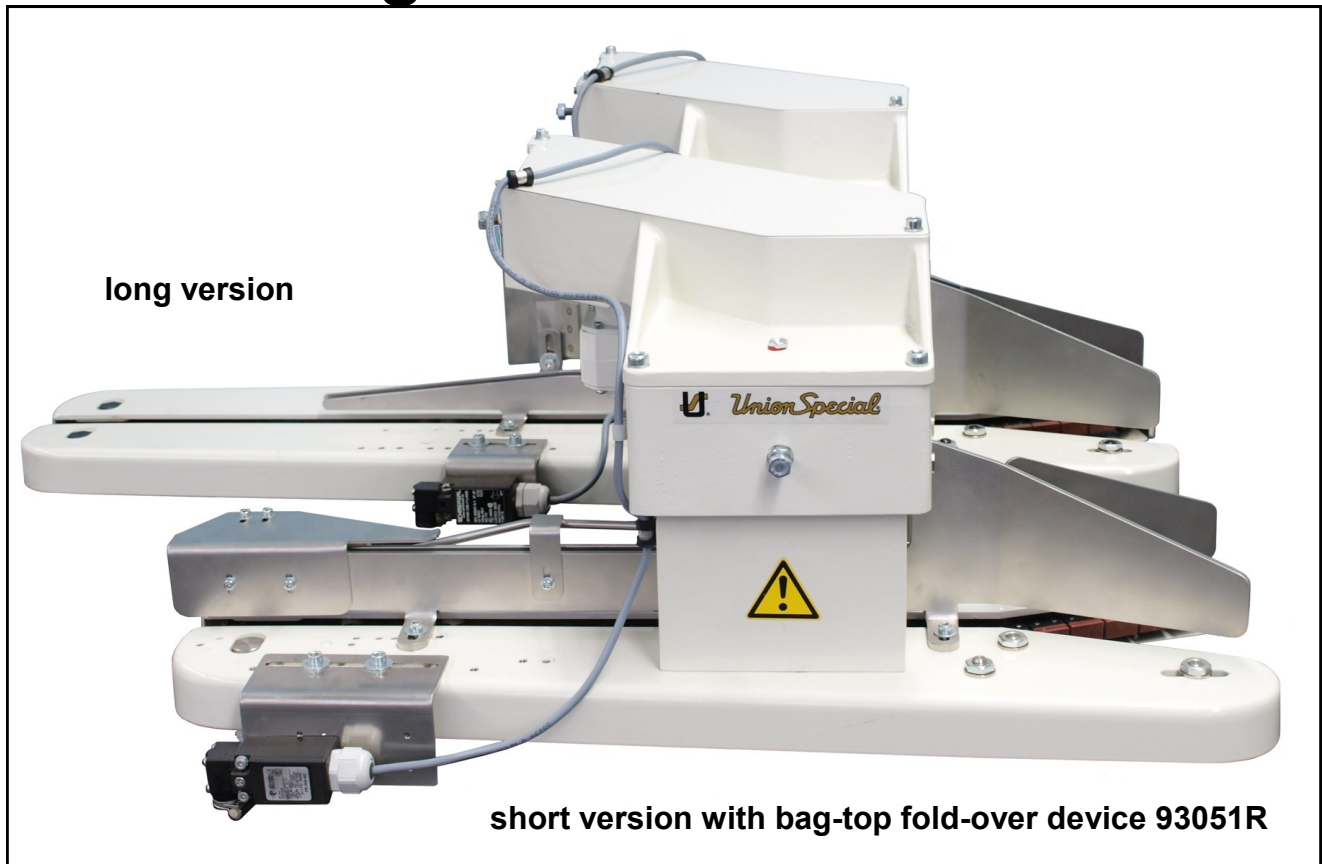

. . . in bag closing

### **Bag Feed-in Devices** for the high speed and high performance bag closing machines Series BC200, BCE200 and 80800

F(S)29900, VN-F29900, FB(S)29900, VN-FB(S)29900, VV-FB29900 (stainless steel,  
No. 1.4571 (316Ti))

frequency controlled speed, Voltage for motor: 230 V, 1 phase, 50 Hz

#### **Common Specification:**

All external parts are rust protected (on VN-F29900, VN-FB(S)29900 additionally ball bearing and roller chain are made of stainless steel)

Rubber coated conveying chains to protect the bag material.

Degree of protection: IP 55. Insulation class: F.

Painting: RAL 9002, powder coated.

Delivery includes pre-feeler switch 29926A to start the sewing machine.

Other voltages and frequencies on request.

● **STURDY**

● **RELIABLE**

● **EFFICIENT**

Part No.	for Machine Styles	Description
<b>FB29905A</b> <b>VN-FB29905A</b> <b>VV-FB29905A</b>	BC/BCE211P16-1M,-1A,-1B BC211PD26-2M, BC211(291)UA24-1M, BC/BCE211UA26-1M 80800RLM, RL, RLB	<b>Bag feed-in device (V-type (V), long bag in-feed)</b> The spread paper, HDPE-foil or woven PP bag is fed into the sewing machine. Speed 11-23 m/min. at 50 Hz. Depending on the length and filling height of the bag the seam can be adjusted to a depth of up to 120 mm from top of the bag, standard setting 30-40 mm. <b><u>VN = rust protected, VV = chemical protected</u></b>
<b>FBS29905A</b> <b>VN-FBS29905A</b>	BC/BCE211P16-1M,-1A,-1B BC211PD26-2M, BC211(291)UA24-1M, 80800RLM, RL, RLB	Same as FB29905A, but <b>parallel (II), long bag in-feed</b> .
<b>93051R</b>		<b>Bag-top fold-over device</b> to fold the bag top to the rear. Assembling to the bag feed-in devices FB29905A and F29905A required. For all kinds of self-supporting bags. Performance test of bag material recommended.
<b>F29905A</b> <b>VN-F29905A</b>	BC/BCE211P16-1M,-1A,-1B BC211PD26-2M, BC211(291)UA24-1M, 80800RLM, RL, RLB	Same as FB29905A, <b>V-type (V), but short version</b> . <b><u>VN = rust protected</u></b>
<b>FS29905A</b>	BC/BCE211P16-1M,-1A,-1B BC211PD26-2M, BC211(291)UA24-1M, 80800RLM, RL, RLB	Same as FBS29905A, <b>parallel (II), but short version</b> .
<b>FB29910A</b> <b>VV-FB29910A</b>	BC211UA24-1M BC/BCE211UA26-1M 80800UALM, UAL, UALB	<b>Combined bag feed-in, trimming and taping device</b> with crepe tape folder ( <b>V-type (V), long bag in-feed</b> ). Width of tape not adjustable. Folder available for 50, 55 and 60mm wide tapes. Please specify. Standard 60mm. Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped before sewing. <b><u>VV = chemical protected</u></b> Performance test of bag material recommended.
<b>FBS29910A</b>	BC211UA24-1M 80800UALM,UAL,UALB	Same as FB29910A, but <b>parallel (II), long bag in-feed</b> .
<b>F29910A</b>	BC211UA24-1M 80800UALM, UAL, UALB	Same as FB29910A <b>V-type (V), but short version</b> .
<b>FS29910A</b>	BC211UA24-1M 80800UALM,UAL,UALB	Same as FBS29910A <b>parallel (II), but short version</b> .
<b>FB29915A</b>	BC/BCE211P16-1M,-1A,-1B BC/BCE211UA26-1M 80800RLM, RL, RLB	<b>Combined bag feed-in, trimming and fold-over device (V-type (V), long bag in-feed)</b> . Speed 11-23 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 50 mm), folded over to the rear by approx. 30-40 mm and fed into the sewing machine. Performance test of bag material recommended.
<b>FBS29915A</b>	BC/BCE211P16-1M,-1A,-1B 80800RLM, RL, RLB	Same as FB29915A, but <b>parallel (II), long bag in-feed</b> .
<b>FB29920A</b> <b>VN-FB29920A</b>	BCE211KA12-1M 80800TALM, TAL	<b>Combined bag feed-in and trimming device (V-type (V), long bag in-feed)</b> . Speed 9-16 m/min. The paper or HDPE-foil bag top is trimmed approx. 20 mm (max. 90 mm). Taped after sewing. Performance test of bag material recommended. <b><u>VN = rust protected</u></b>

Subject to change without notice © Union Special GmbH