


Introducing the better choice . . .



Belt Drive

NEW

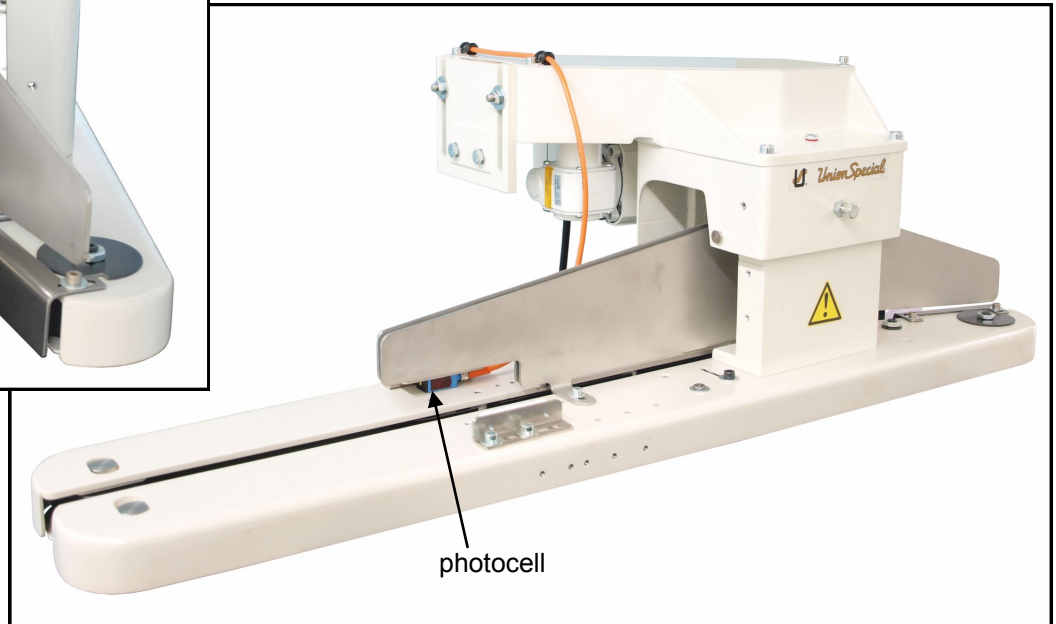

. . . in bag closing

Bag Feed-in Devices with Belt Drive
for the high speed and high performance bag closing machines
Series BC200, BCE200 and 80800

Frequency controlled speed, Voltage for motor: 230 V, 1 phase, 50 Hz

BFB29905: Bag feed-in device with belt drive (V-type (V), long bag in-feed)

The spread paper, HDPE-foil or woven PP bag is fed into the sewing machine.

Speed 11-23 m/min. at 50 Hz. Depending on the length and filling height of the bag the seam can be adjusted to a depth of up to 120 mm from top of the bag, standard setting 30-40 mm.

Common Specification:

All external parts are rust protected.

Belt conveyor to protect the bag material.

Degree of protection: IP 55. Insulation class: F.

Painting: RAL 9002, powder coated.

Delivery includes pre-feeler switch 29926A (position switch) to start the sewing machine.

Option: By photocell 29926EOS (see picture)

Other voltages and frequencies on request.

Subject to change without notice © Union Special GmbH