


TANDEM NEEDLE DOUBLE CHAINSTITCH MACHINE WITH TOP AND BOTTOM FEED FOR EFFECTIVELY MANUFACTURING BAGS

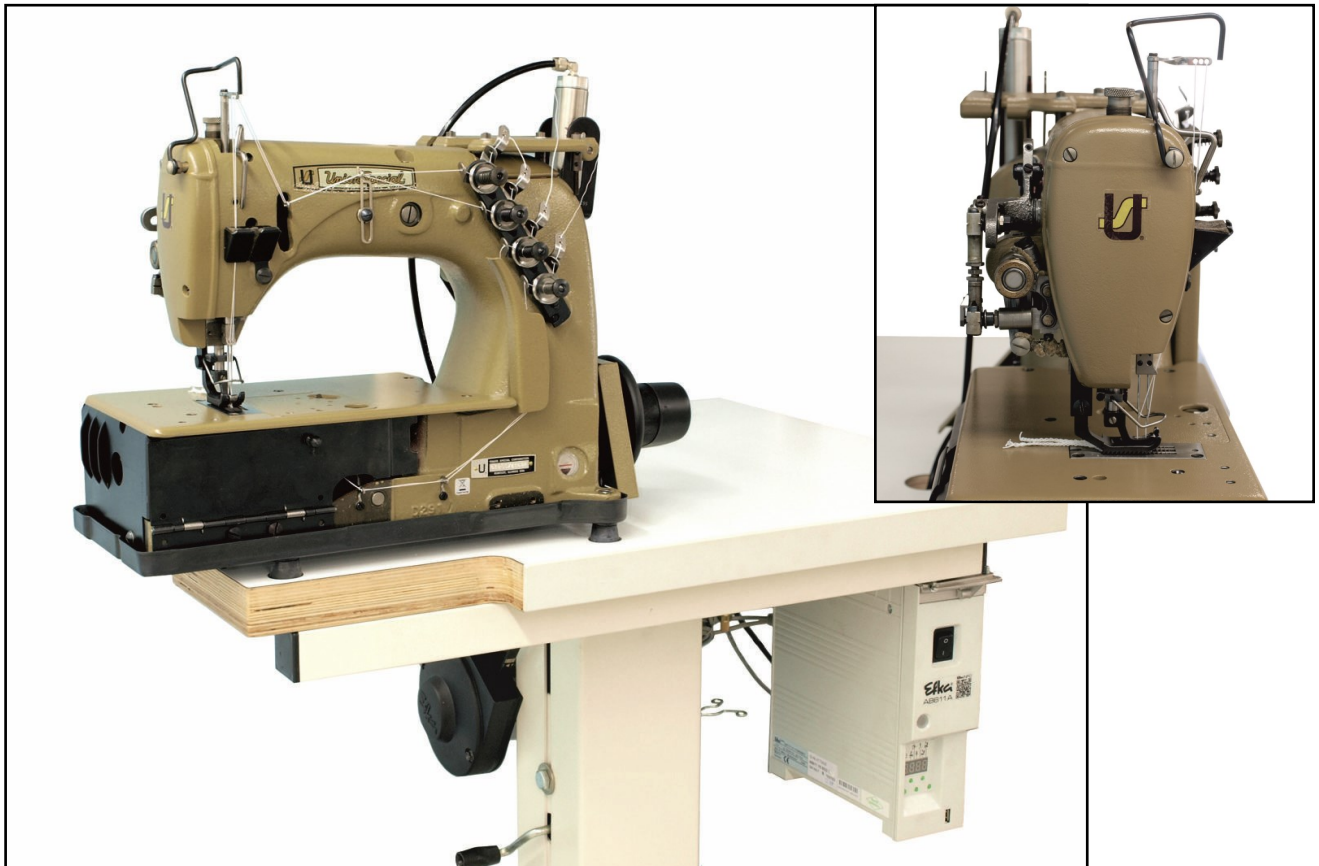

53800Z4068A

Two needle double chainstitch flat bed machine with top and bottom feed to assure perfectly matched plies on bags (FIBCs) made of medium weight woven polypropylene fabric.

Max. Speed: 3300 stitches/min. (depending on sewing operation)
Threads: four, machine sewn off with 1300 Denier
Needle: two, standard 130GS140/054
Seam Specification: (401.401) SSa-2
Stitch Length: 3.5 mm
Needle Distance: 0.4 mm (staggered)

Installation: PN463A862L Pedestal with clutchless electronic drive.
Electro-pneumatic presser foot lifter.

Subject to change without notice © Union Special GmbH