


NEW GENERATION

IMPROVED "ECONOMY" LINE

with vertical acting presser foot system and rust protected parts

Introducing the better choice...

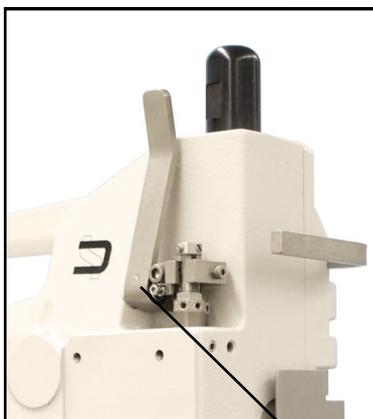

... in bag closing

IMPROVED "ECONOMY" BAG CLOSING MACHINE

Features:

- Vertical acting presser foot system
- Rust protected external parts
- Fast: up to 2000 RPM, depending on stitch length, operation and material.
- Shell design casting
- New thread control system
- Internal forced lubrication
- Feeding direction right to left

Benefits:

- Improved needle thread take up control
- Low noise and vibration
- Independently adjustable chaining and presser foot pressure for optimized bag feeding
- High production: up to 20 bags per minute with a linear sewing speed up to 16 m/min. (at 9 mm stitch length), depending on operation and material.
- Longer part life
- Easily set a loose or tight seam as needed
- Simplified maintenance

● STURDY

● RELIABLE

● EFFICIENT

Improved Automatic "ECONOMY" Bag Closing Machine with vertical acting presser foot system

BCE311P16-1M: Single needle two thread double locked chainstitch bag closing machine (stitch type 401) for closing filled bags. Start-stop automatically by feeler controlled proximity switch. Thread chain is automatically cut by electro-pneumatically operated jump out scissors. Stitch length easily adjustable from 6.5 to 11.5 mm (2-4 SPI), standard setting 9 mm (3 SPI). Capacity under presser foot up to 12.7 mm depending on style. Sewing capacity on paper up to 32 plies depending on weight of paper. Control voltage 24 V DC.

BCE311P16-1A: Same as BCE311P16-1M, but control voltage 200-230V, 50/60 Hz.

BCE391P16-1M: Same as BCE311P16-1M, but single-thread chainstitch bag closing machine (stitch type 101)


BCE311UA26-1M: Single needle two thread double locked chainstitch bag closing machine (stitch type 401) for closing filled bags with or without a crepe paper or PP-tape. (Without tape folder) Start-stop automatically by feeler controlled proximity switch. Tape respectively thread chain with or without filler cord are automatically trimmed by an **"advanced" electro-pneumatically operated guillotine**. (Activated by double acting air cylinder, see picture detail)

Advantage: Reliable trimming of thread chain with or without filler cord (respectively crepe tape).


Sewing speed with crepe paper or PP-tape: up to approx. 12m/min. (at 9 mm stitch length)

For application with bag feed-in devices, with tape folder. Tape width: 50, 60 (standard), 70 and 75 mm. Please specify when ordering.

BCE311U26-1M: Same as BCE311UA26-1M, but with tape folder, adjusting range 50 to 70 mm. For manual sewing.

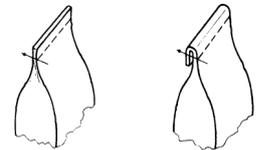

Fold-over closure manually by operator or by additional bag feed-in device with bag-top fold-over device

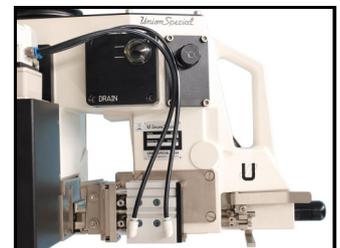

Sewing without crepe tape Sewing with crepe tape